


Non Perforated Cable Trays WRF, PG, Fast Connection, Width: 50 mm, Height: 35 mm, Thickness: 0.7 mm

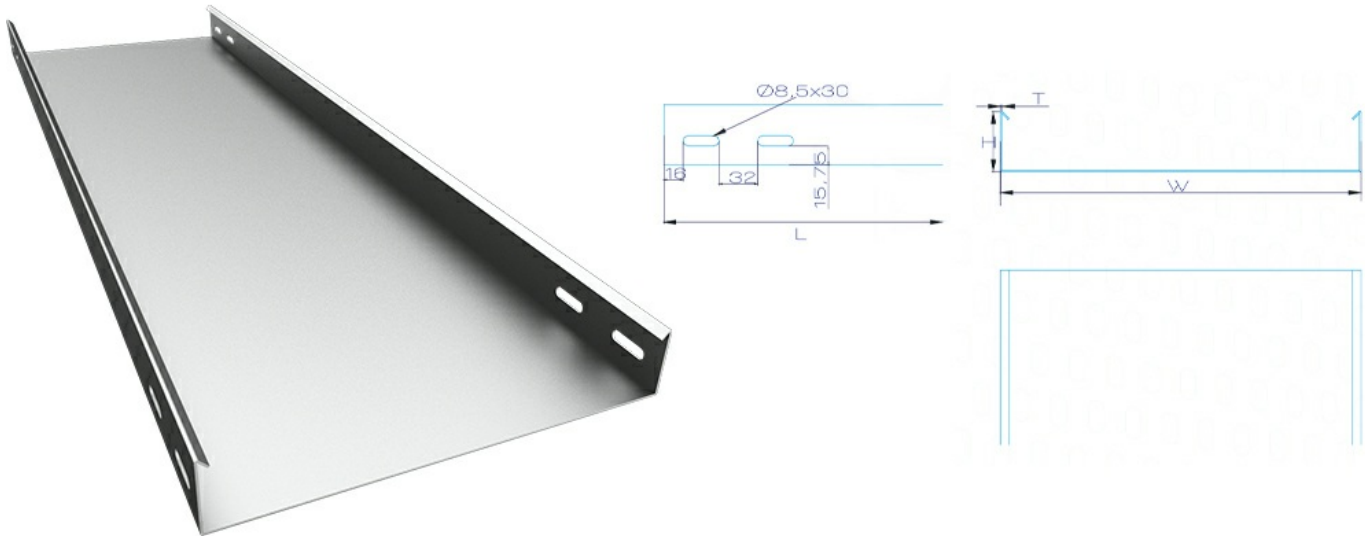

Description

Perforated and Solid Cable Tray is a one piece support with either ventilated (perforated) or solid bottom (non perforated) sections. These sections are used with a single power cable, multiple control, or signal circuit cables.

Features & Benefits:

- Designed to support cabling in 3.0m spans or less. Two flange designs to provide added overall strength to tray
- Perforated bottom design allows for hold down attachment, cable attachment, and heat dissipation
- Continuous solid bottom tray allows for constant cable support

Dimensions

Thickness	0.7 mm
Width	50.0 mm
Height	35.0 mm
Length	3000.0 mm
Weight	2.31 Kg
Finish	PG
Connection Type	Fast Connection