



# Microinverter

SUN-M130/160/180/200/220G4-EU-Q0

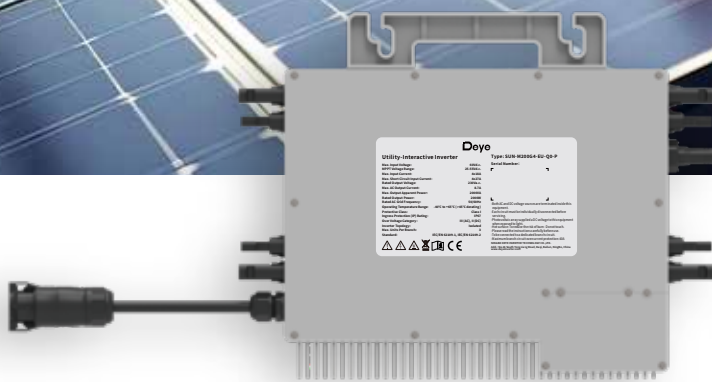


**18** Max. DC input current of 18A, adapt to 770W PV module

 IP67 protection degree, 10 years warranty

 4 MPP trackers, module level monitoring

 Wi-Fi communication

 Rapid shutdown function

**Deye**

Stock Code: 605117.SH

Model	SUN-M130G4 -EU-Q0	SUN-M160G4 -EU-Q0	SUN-M180G4 -EU-Q0	SUN-M200G4 -EU-Q0	SUN-M220G4 -EU-Q0
<b>PV String Input Data</b>					
Max. PV Input Power (W)	210-460 (4 Pieces)	210-560 (4 Pieces)	210-630 (4 Pieces)	210-700 (4 Pieces)	210-770 (4 Pieces)
Max. PV Input Voltage (V)	60				
Start-up Voltage (V)	20				
MPPT Voltage Range (V)	25-55				
Rated PV Input Voltage (V)	42.5				
Max. Operating PV Input Current (A)	15+15+15+15				18+18+18+18
Max. Input Short Circuit Current (A)	22.5+22.5+22.5+22.5				27+27+27+27
No. of MPP Trackers/ No. of Strings MPP Tracker	4/1				
<b>AC Output Side</b>					
Rated AC Output Active Power (W)	1300	1600	1800	2000	2200
Max. AC Output Apparent Power (VA)	1300	1600	1800	2000	2200
Rated AC Output Current (A)	6/5.7	7.3/7	8.2/7.9	9.1/8.7	10/9.6
Max. AC Output Current (A)	6/5.7	7.3/7	8.2/7.9	9.1/8.7	10/9.6
Rated Output Voltage/Range (V)	220/230 0.85Un-1.1Un				
Grid Connection Form	L/N/PE				
Rated Output Grid Frequency/Range(Hz)	50/45-55, 60/55-65				
Max. Unit per Branch	5	4	3	3	3
Power Factor Adjustment Range	0.9 leading-0.9 lagging				
Total Current Harmonic Distortion THDi	<3%				
DC Injection Current	<0.5%In				
<b>Efficiency</b>					
Max. Efficiency	96.5%				
Euro Efficiency	96.0%				
MPPT Efficiency	>99%				
<b>Equipment Protection</b>					
DC Reverse Polarity Protection	Yes				
AC Output Overcurrent Protection	Yes				
AC Output Overvoltage Protection	Yes				
AC Output Short Circuit Protection	Yes				
Thermal Protection	Yes				
Insulation Impedance Detection	Yes				
Anti-islanding Protection	Yes				
Surge Protection Level	TYPE II(AC)				
<b>General Data</b>					
Operating Temperature Range (°C)	-40 to +65°C, >45°C Derating				
Permissible Ambient Humidity	0-100%				
Permissible Altitude (m)	2000m				
Noise (dB)	≤25				
Ingress Protection(IP) Rating	IP 67				
Inverter Topology	Isolated				
Over Voltage Category	OVC II(DC), OVC III(AC)				
Communication	Wi-Fi				
Cabinet Size (WxHxD mm) (Excluding Connectors and Brackets)	311×250.5×36.5				358×255.5×36.5
Weight (kg)	5.1				5.2
Warranty	10 Years				
Type of Cooling	Natural Cooling				
Grid Regulation	IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, G98, G99, VDE-AR-N 4105				
Safety EMC/Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2				