

SG15KTL-M/SG20KTL-M

Multi-MPPT String Inverter for 1000 Vdc System



High Yield



- Max. efficiency 98.6 %, European efficiency 98.3 %
- 1.1 overload capacity, 10% more yield under high irradiance
- Adapt to complex power grid, extend the grid-connected generation time
- Patented PID recovery function optional

Easy O&M




- 24kg, easy O&M
- Plug and play design, easy installation
- String current monitoring function for fast trouble shooting
- Fast commissioning, easy local and on-line monitoring

Safe and Reliable




- High power quality, no interference for electrical equipment
- Low radiation, compliance with household equipment standards
- High anti-corrosion with aluminum alloy die casting
- Built-in surge arresters and residual current protection

Circuit Diagram

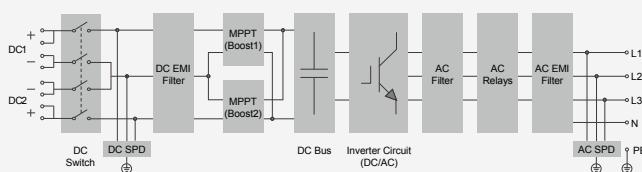

Efficiency Curve

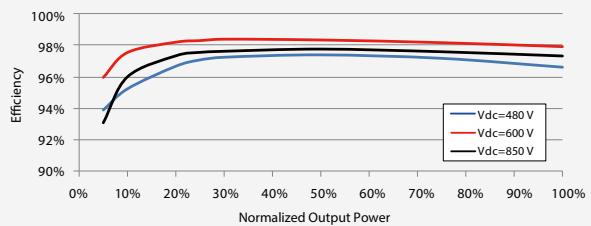

Input (DC)	SG15KTL-M	SG20KTL-M
Max. PV input voltage	1100 V	
Min. PV input voltage / Startup input voltage	200 V / 250 V	
Nominal input voltage	600 V	
MPP voltage range	200 V – 1000 V	
MPP voltage range for nominal power	380 V – 850 V	480 V – 850 V
No. of independent MPP inputs	2	
Max. number of PV strings per MPPT	2	
Max. PV input current	44A (22 A / 22 A)	
Max. current for input connector	15 A	
Max. DC short-circuit current	60 A (30 A / 30 A)	
Output (AC)		
AC output power	16500 VA @ 35 °C / 15000 kVA @ 45 °C	22000 VA @ 35 °C / 20000 kVA @ 45 °C
Max. AC output current	24.0 A	31.9 A
Nominal AC voltage	3 / N / PE, 230 / 400 V	
AC voltage range	270 V – 480 V	
Nominal grid frequency / Grid frequency range	50 Hz / 45 – 55 Hz, 60 Hz / 55 – 65 Hz	
THD	< 3 % (at nominal power)	
DC current injection	< 0.5 % In	
Power factor at nominal power / Adjustable power factor	> 0.99 / 0.8 leading – 0.8 lagging	
Feed-in phases / Connection phases	3 / 3	
Efficiency		
Max. efficiency / Euro. efficiency	98.6 % / 98.3 %	
Protection		
DC reverse connection protection	Yes	
AC short-circuit protection	Yes	
Leakage current protection	Yes	
Grid monitoring	Yes	
DC switch / AC switch	Yes / No	
PV string current monitoring	Yes	
PID recovery function	Optional	
Oversupply protection	DC Type II / AC Type II	
General Data		
Dimensions (W*H*D)	370*485*210 mm	
Weight	24 kg	
Isolation method	Transformerless	
Degree of protection	IP65	
Night power consumption	< 1 W	
Operating ambient temperature range	-25 to 60 °C (> 45 °C derating)	
Allowable relative humidity range (non-condensing)	0 – 100 %	
Cooling method	Smart forced air cooling	
Max. operating altitude	4000 m (> 3000 m derating)	
Display / Communication	LED, Bluetooth + APP / RS485 (Optional: WiFi / Ethernet)	
DC connection type	MC4 (Max. 6 mm ²)	
AC connection type	Plug and play connector (Max. 10 mm ²)	
Compliance	EN 62109-1, EN 62109-2, EN 61000-3-11, EN 61000-3-12, UTE C15-712-1, IEC 61727, IEC 62116, VDE0126-1-1/4105, AS 4777.2, IEC 60068, IEC 61683, EN 50530, CEI 0-21	
Grid support	Active & reactive power control and power ramp rate control	
Type designation	SG15KTL-M-10	SG20KTL-M-10

