


ACSR/TP ASTM B 911 Conductor, 655.8mm², Dove / TP

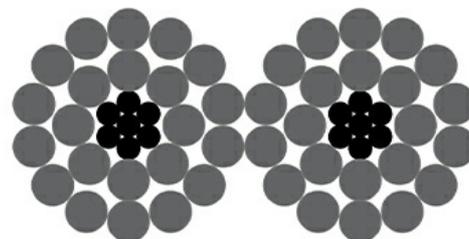

Specifications

Conductor Name	Dove / TP
Conductor Sectional Area	655.8 mm ²
Alluminium Wires No.	26.0
Alluminium Wire Diamenter	3.71 mm
Steel Wires No.	7.0
Steel Wire Diameter	2.89 mm
Outer Dimensions Minor	23.55 mm
Outer Dimensions Major	47.09 mm
Conductor Diameter	38.52 mm
Weight Aluminium	1559 kg/km
Weight Steel	718 kg/km
Conductor Weight	2277 kg/km
Rated Strength	201.1 kN
DC Resistance@ 20°C	0.05 Ω/km
Current Capacity @75°C	665 A
Current Capacity @85°C	867 A

The above design is only a sample of the options available, for reference purposes only. Our policy of continuous improvement may result in a change of specifications without notice. If any discrepancies might be between the data sheet values and standards, we reserve the rights to make technical changes. Our company will not be held responsible, as all or any of pictures, drawings, weights and dimensions details or other elements in this document are only indicative and must not be considered contractual. Contact our sales team for other specifications or custom made products.