


# ACSR/TP ASTM B 911 Conductor, 1119.1mm<sup>2</sup>, Ortolan / TP

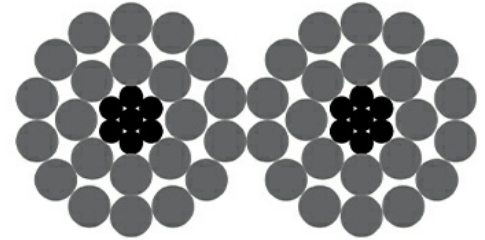

## Specifications

Conductor Name	Ortolan / TP
Conductor Sectional Area	1119.1 mm <sup>2</sup>
Alluminium Wires No.	45.0
Alluminium Wire Diamenter	3.84 mm
Steel Wires No.	7.0
Steel Wire Diameter	2.56 mm
Outer Dimensions Minor	30.79 mm
Outer Dimensions Major	61.57 mm
Conductor Diameter	50.36 mm
Weight Aluminium	2898 kg/km
Weight Steel	565 kg/km
Conductor Weight	3463 kg/km
Rated Strength	246.4 kN
DC Resistance@ 20°C	0.03 Ω/km
Current Capacity @75°C	901 A
Current Capacity @85°C	1211 A

The above design is only a sample of the options available, for reference purposes only. Our policy of continuous improvement may result in a change of specifications without notice. If any discrepancies might be between the data sheet values and standards, we reserve the rights to make technical changes. Our company will not be held responsible, as all or any of pictures, drawings, weights and dimensions details or other elements in this document are only indicative and must not be considered contractual. Contact our sales team for other specifications or custom made products.