


ACSR/TP ASTM B 911 Conductor, 1182.4mm², Curlew / TP

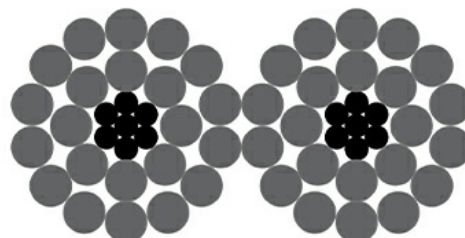

Specifications

Conductor Name	Curlew / TP
Conductor Sectional Area	1182.4 mm ²
Alluminium Wires No.	54.0
Alluminium Wire Diamenter	3.51 mm
Steel Wires No.	7.0
Steel Wire Diameter	3.51 mm
Outer Dimensions Minor	31.62 mm
Outer Dimensions Major	63.25 mm
Conductor Diameter	51.74 mm
Weight Aluminium	2897 kg/km
Weight Steel	1060 kg/km
Conductor Weight	3957 kg/km
Rated Strength	326.1 kN
DC Resistance@ 20°C	0.03 Ω/km
Current Capacity @75°C	904 A
Current Capacity @85°C	1220 A

The above design is only a sample of the options available, for reference purposes only. Our policy of continuous improvement may result in a change of specifications without notice. If any discrepancies might be between the data sheet values and standards, we reserve the rights to make technical changes. Our company will not be held responsible, as all or any of pictures, drawings, weights and dimensions details or other elements in this document are only indicative and must not be considered contractual. Contact our sales team for other specifications or custom made products.