



## TACSR/AW Conductor, 629.77mm<sup>2</sup>

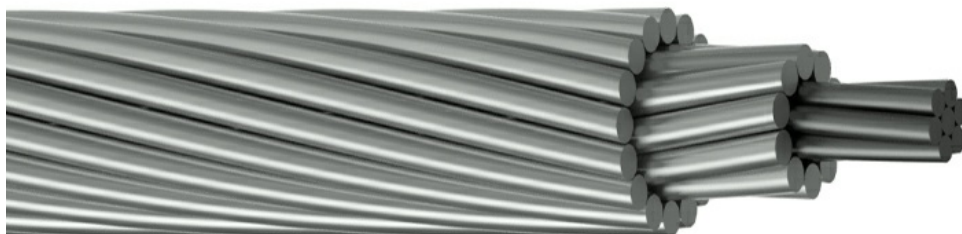

### Specifications

Tal Wires No.	54
Steel Wires No.	19
Tal Wire Diameter	3.63 mm
Steel Wire Diameter	2.18 mm
Tal Wires Sectional Area	558.85 mm <sup>2</sup>
Steel Wires Sectional Area	70.92 mm <sup>2</sup>
Conductor Sectional Area	629.77 mm <sup>2</sup>
Conductor Diameter	32.68 mm
Weight Tal	1545.77 kg/km
Weight Steel	470.96 kg/km
Conductor Weight	2016.73 kg/km
Rated Strength HS	175.64 kN
Rated Strength EHS	189.11 kN
Rated Strength	N/A kN
Rated Strength UHS	N/A kN
DC Resistance@ 20°C	0.0504 Ω/km
Current Capacity @85°C	829 A
Current Capacity @150°C	1496 A

The above design is only a sample of the options available, for reference purposes only. Our policy of continuous improvement may result in a change of specifications without notice. If any discrepancies might be between the data sheet values and standards, we reserve the rights to make technical changes. Our company will not be held responsible, as all or any of pictures, drawings, weights and dimensions details or other elements in this document are only indicative and must not be considered contractual. Contact our sales team for other specifications or custom made products.