

PRODUCT DATASHEET

PL SF 674 SNP V 32W ML 93040

PANEL SURFACE SENSOR 674 | Surface-mounted refurbishment luminaires with integrated PIR sensor, 674 x 674 mm



Areas of application

- Offices, conference rooms
- Reception areas, foyers, corridors

Product benefits

- Multiple settings for sensor range, daylight detection, hold time and DIM-level /-period by DIP switches
- Square refurbishment luminaire for replacing standard T5 and T8 surface-mounted luminaires
- Enlarged luminaire dimensions to cover mounting marks of existing luminaire
- Highly versatile due to selectable lumen levels and light colors (Multi Select)
- Through-wiring possible with included connector box
- Easy mounting by single person
- Versions with reduced glare (U19) for office applications available

Product features

- Integrated PIR sensor with corridor function
- High color rendering (CRI > 90) with up to 130 lm/W
- Robust one-piece metal frame
- Polystyrene diffuser
- High color consistency: ≤ 3 SDCM



TECHNICAL DATA


Electrical data

Nominal wattage	32 W / 27 W / 21 W
Nominal voltage	220...240 V
Mains frequency	50/60 Hz
Nominal current	140mA / 120mA / 95 mA
Inrush current	0.135 A
Inrush current time T_{h50}	135 μ s
Max. number of luminaires per miniature circuit breaker B16	22
Max. number of luminaires per miniature circuit breaker C10	17
Max. number of luminaires per miniature circuit breaker C16	27
Power factor λ	> 0.90
Total harmonic distortion	< 15 %
Protection class	II
Operating mode	External LED driver


Photometrical data

Luminous flux	4160 lm / 3645 lm / 2940 lm ¹⁾
Luminous efficacy	140 lm/W / 135 lm/W / 130 lm/W
Color temperature	3000 K / 4000 K
Reference control setting of contained light source (Kelvin)	4000 K
Light color (designation)	Warm White / Cool White
Color rendering index Ra	> 90
Standard deviation of color matching	3 sdcn
Low flicker	Yes
Flickering metric (Pst LM)	<1
Stroboscope effect metric (SVM)	< 0.4
Photobiological safety group acc. to EN62778	RG0
Beam angle	120 °


1) 4000 lm / 3510 lm / 2835 lm @3000K




PL SF 674 SNP V 32W 930 4160lm



PL SF 674 SNP V 32W 940 4160lm



PL SF 674 SNP V 32W 930 4160lm



PL SF 674 SNP V 32W 940 4160lm


Adjustable attributes

Nominal wattage	Color temperature	Luminous flux	Luminous efficacy
21 W	3000 K	2835 lm	135 lm/W
21 W	4000 K	2940 lm	140 lm/W
27 W	3000 K	3510 lm	130 lm/W
27 W	4000 K	3645 lm	135 lm/W
32 W	3000 K	4000 lm	125 lm/W
32 W	4000 K	4160 lm	130 lm/W

Dimensions & Weight

Length	674.00 mm
Width	674.00 mm
Height	78.00 mm
Product weight	3660.00 g

503 Service Temporarily Unavailable



PL SF 674 SNP

Materials & Colors

Product color	White
Housing color	White
RAL Color (most similar)	RAL 9003
Body material	Aluminum
Cover material	Polystyrene (PS)
Light emitting surface material	Polystyrene
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-10...+40 °C
Temperature range at storage	-20...+70 °C
Type of connection	Screwless terminal, 2-Pole (L, N)
Type of protection	IP20
Protection class IK (shock resistance)	IK02
Dimmable	No
Mounting type	Surface/Suspended
Mounting location	Ceiling
Application environment	Indoor
Adjustable	No
With light source	Yes
Replaceable light source	No

Lifespan

503 Service Temporarily Unavailable

Lifespan L70/B50 at 25 °C	100000 h ¹⁾
Lifespan L80/B10 at 25 °C	75000 h ¹⁾
Lifespan L80/B50 at 25 °C	75000 h
Number of switching cycles	50000

1) t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

Output current	700mA / 600mA / 470 mA
ECG - Output ripple current	< 5 %
Recommended control gear	LEDVANCE 32WConstant Current PIR LED Power

Sensor

Type of sensor	Motion
Sensor technology	Passive infrared (PIR)
Sensor detection angle	360 °
Sensor controlled switching time	5 s...20 min
Detection range of motion sensor	1...3 m
Detection threshold of daylight sensor	10...150 lx
Sensor IK rating	IK02

Emergency lighting

Type of Emergency Lighting (EL)	Optional EL unit (battery and controller) for decentral operation available separately
Type of emergency operation test	None
Wattage in emergency operation mode	5 W
Luminous flux in emergency operation mode	650 lm

Certificates & Standards

Standards	CE / CB / EAC / ENEC / ROHS / ERP / UKCA
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
Replaceable light source (EPREL)	Not replaceable

Additional product data

Product remark	Available from March 2026
Added function	MULTI SELECT

Accessories Optional

503 Service Temporarily Unavailable

Product image	Product name	EAN
	PL SF SUSPENSION KIT L/E/N	4099854732003
	EL KIT COMP 55V 4W LI MT AT 3H WT	4058075860711

EQUIPMENT / ACCESSORIES

- Suspension kit available as separate accessory

Safety advice

- All electrical connections must be made by a qualified person.
- The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire must be disposed of.
- Caution, risk of electric shock.
- The luminaires are not suitable for covering with thermally insulated material.

DOWNLOAD DATA

	Documents and certificates	Document name
	User instruction / safety instructions	User Instruction G11256010 PL SURFACE
	Legal information	Safety Insert G11207793
	Legal information	Legal Insert G11146927
	Legal information	PL SF
	Legal information	PL SF
	Declarations of conformity	PL SF
	Declarations of conformity UKCA	PL SF

Photometric and lighting design files		Document name
	IES file (IES)	PL SF 674 SNP V 32W 930 4160lm
	IES file (IES)	PL SF 674 SNP V 32W 940 4160lm
	LDT file (Eulumdat)	PL SF 674 SNP V 32W 930 4160lm
	LDT file (Eulumdat)	PL SF 674 SNP V 32W 940 4160lm
	ROLF file (RELUX)	PL SF 674 SNP V 32W ML 93040
	UGR file (UGR table)	PL SF 674 SNP V 32W 930 4160lm
	UGR file (UGR table)	PL SF 674 SNP V 32W 940 4160lm
	Light distribution curve type cone	PL SF 674 SNP V 32W 930 4160lm
	Light distribution curve type cone	PL SF 674 SNP V 32W 940 4160lm
	Light distribution curve type polar	PL SF 674 SNP V 32W 930 4160lm
	Light distribution curve type polar	PL SF 674 SNP V 32W 940 4160lm
CAD/BIM files		Document name
	BIM Revit 3D	Panel-Surface
	CAD STEP 3D	PL SF SNP 674


LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854731808	Folding box 1	95 mm x 691 mm x 700 mm	4384.00 g	45.95 dm ³
4099854731815	Shipping box 2	710 mm x 210 mm x 728 mm	9974.00 g	108.54 dm ³




The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION

503 Service Temporarily Unavailable



PANEL SURFACE	DRIVER	W	h	ln	ln/W	
PL SF 674	PL SF 674 940 (+SNP)	32	700	4160	130	
		27	600	3645	135	
		21	470	2340	140	
	PL SF 674 930 (+SNP)	32	700	4000	125	
		27	600	3610	130	
		21	470	2825	135	
PL SF 1274	PL SF 1274 940 (+SNP)	32	700	4160	130	
		27	600	3645	135	
		21	470	2340	140	
	PL SF 1274 930 (+SNP)	32	700	4000	125	
		27	600	3610	130	
		21	470	2825	135	
PL SF 1574	PL SF 1574 940 (+SNP)	48	1050	6240	130	
		38	900	5265	135	
		31	700	4000	125	
	PL SF 1574 930 (+SNP)	48	1050	6000	125	
		38	900	5100	130	
		31	700	4160	130	
PL SF 674 DA 940	DR DALI-P-4220-240V-1A0 EAN 4099575640381	32	700	4160	130	
		27	600	3645	135	
		21	470	2340	140	
	PL SF 674 DA 930	DR DALI-P-4220-240V-1A0 EAN 4099575640381	32	700	4000	125
			27	600	3610	130
			21	470	2825	135
PL SF 674 ZB 940	DR ZIGBEE NP P-40W 220-240V-1A2 EAN 4099954666878	32	700	4160	130	
		27	600	3645	135	
		21	470	2340	140	
	PL SF 674 ZB 930	DR ZIGBEE NP P-40W 220-240V-1A2 EAN 4099954666878	32	700	4000	125
			27	600	3610	130
			21	470	2825	135
PL SF 1274 DA 940	DR DALI-P-4220-240V-1A0 EAN 4099575640381	38	850	4800	120	
		31	700	4000	125	
		27	600	3510	130	
	PL SF 1274 DA 930	DR DALI-P-4220-240V-1A0 EAN 4099575640381	38	850	4650	125
			31	700	3750	130
			27	600	2810	135
PL SF 1274 ZB 940	DR ZIGBEE NP P-40W 220-240V-1A2 EAN 4099954666878	38	850	4800	120	
		31	700	4000	125	
		27	600	3510	130	
	PL SF 1274 ZB 930	DR ZIGBEE NP P-40W 220-240V-1A2 EAN 4099954666878	38	850	4650	125
			31	700	3750	130
			27	600	2810	135
PL SF 1574 DA 940	DR DALI-P-4220-240V-1A0 EAN 4099575640381	48	1050	6240	130	
		38	900	5265	135	
		31	700	4000	125	
	PL SF 1574 DA 930	DR DALI-P-4220-240V-1A0 EAN 4099575640381	48	1050	6000	125
			38	900	5100	130
			31	700	4160	130
PL SF 1574 ZB 940	DR ZIGBEE NP P-40W 220-240V-1A2 EAN 4099954666878	48	1050	6240	130	
		38	900	5265	135	
		31	700	4000	125	
	PL SF 1574 ZB 930	DR ZIGBEE NP P-40W 220-240V-1A2 EAN 4099954666878	48	1050	6000	125
			38	900	5100	130
			31	700	4160	130

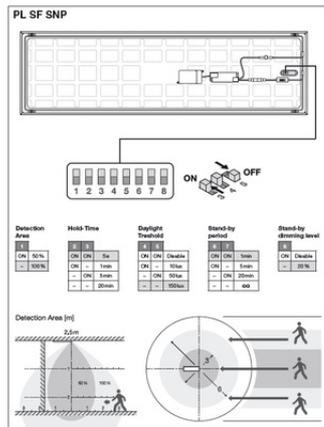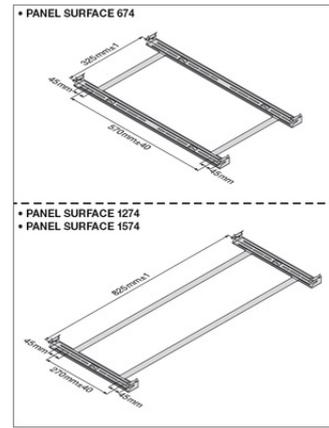

References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

503 Service Temporarily Unavailable