

PRODUCT DATASHEET

LN INV D 1500 P 52W 930 DAVR SN BK

LINEAR INDIVILED DIRECT 1500 DALI SENSOR | Surface mounted luminaire for single or light line office application with CRI90 and DALI sensor, 1500 mm



Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Offices, education, public buildings
- Single and continuous line configuration
- Direct lighting



Product benefits

- Easy upgradeability of light source and driver (EVERLOOP design)
- Homogenous light distribution and reduced glare ($UGR \leq 19$) thanks to IndiviLED® optics
- High performance with CRI90 and up to 130 lm/W
- IoT-ready luminaire with DALI-2 driver, suitable for VIVARES and other Light Management Systems
- Symmetric light distribution for various application areas
- Extended services such as energy monitoring and remote maintenance possible with DALI versions
- High color consistency with SDCM 3
- Easy installation
- Low flicker light thanks to special electronic control gear
- Suitable for battery emergency installations acc. to EN 60598-2-22
- Multiple mounting options thanks to different accessories

Product features

- Minimalistic LEDVANCE SCALE design in extruded aluminum housing, available in white and black color



- Includes EVERLOOP: Convenient replacement of light source and LED driver
- PIR-Sensor with leader-follower function
- Combined daylight and motion detection
- Individual adjustment of the parameters with configuration software or remote control
- Linkable into seamless light line with accessories (surface or pendant mounting)
- Pendant mounting with suspension kit (to be ordered separately)
- Glow Wire Test according to IEC 60695-2-12: 850 °C
- 5-pole terminal block, cable cross section up to 5 x 2.5 mm²
- Lifetime (L80/B10): 70,000 h (at 25 °C)
- Multi Lumen function: programmable DALI-2 driver


TECHNICAL DATA

Electrical data

Nominal wattage	52 W / 48 W / 44 W / 39 W
Nominal voltage	220...240 V
Mains frequency	0/50/60 Hz
Nominal current	232...210...200...185 mA
Inrush current	25.2 A
Inrush current time T_{h50}	40 μ s
Max. number of luminaires per miniature circuit breaker B16	29
Max. number of luminaires per miniature circuit breaker C10	23
Max. number of luminaires per miniature circuit breaker C16	38
Power factor λ	> 0.90
Total harmonic distortion	\leq 20 %
Protection class	I
Operating mode	Integrated LED driver
Dimming interface	DALI-2 / IoT

Photometrical data

Luminous flux	5950 lm / 5450 lm / 5250 lm / 4700 lm
Luminous efficacy	114 lm/W / 119 lm/W / 121 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	\geq 90
Standard deviation of color matching	3 sdc _m
Low flicker	Yes
Flickering metric (Pst LM)	\leq 1
Stroboscope effect metric (SVM)	\leq 0.4
Photobiological safety group acc. to EN62778	RG1
Photobiological safety group acc. to EN62471	RG0
Beam angle	90 °
UGR	< 19




LN INV D 1500 P 52W 930 DA VR
BK

Adjustable attributes

Nominal wattage	Color temperature	Luminous flux	Luminous efficacy
52 W	3000 K	5950 lm	114 lm/W
48 W	3000 K	5450 lm	114 lm/W
44 W	3000 K	5250 lm	119 lm/W
39 W	3000 K	4700 lm	121 lm/W

Dimensions & Weight

Length	1475.00 mm
Width	125.00 mm
Height	43.00 mm
Product weight	3870.00 g



LN INV 1200 P

Materials & Colors

Product color	Black
Housing color	Black
RAL Color (most similar)	RAL 9005
Body material	Aluminum
Cover material	Polymethylmethacrylate (PMMA)
Light emitting surface material	Polymethylmethacrylate (PMMA)
Glow Wire Test according to IEC 60695-2-12	850 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20...+50 °C
Temperature range at storage	-20...+80 °C
Type of connection	Screwless terminal, 5-Pole (L, N, PE, DA+, DA-)
Type of protection	IP20
Protection class IK (shock resistance)	IK06
Dimmable	Yes
Type of dimming	DALI-2
IoT ready	Support of DALI data type PART 251, 252, 253 ¹⁾
Mounting type	Suspended/Surface
Mounting location	Ceiling
Application environment	Indoor
Adjustable	No
With light source	Yes
Replaceable light source	Yes

¹⁾ Internet of Things. Supports data transfer via gateway to cloud-based monitoring platforms, such as LEDVANCE VIVARES Cloud

Lifespan

Lifespan L70/B50 at 25 °C	100000 h ¹⁾
Lifespan L80/B10 at 25 °C	70000 h ¹⁾
Lifespan L80/B50 at 25 °C	70000 h
Lifespan L90/B10 at 25 °C	35000 h
Number of switching cycles	25000

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

Output current	1050mA / 975mA / 900mA / 800 mA
ECG - Output ripple current	≤ 5 %
Recommended control gear	OSRAM type OTI DALI 50/220-240/1A4 NFC L

Sensor

Type of sensor	Motion / Light
Sensor technology	Passive infrared/Photocell
Sensor detection angle	80 °
Sensor controlled switching time	10 s ... 30 min
Detection range of motion sensor	1.7 m ... 4 m





Certificates & Standards

Standards	CE / CB / ENEC / TÜV SÜD / UKCA / EAC / EPD
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
EPD	LEDV-00073-V01.01-EN
Replaceable light source (EPREL)	Only by an expert





Additional product data

Added function	EVERLOOP / Programmable Multi Lumen
----------------	-------------------------------------

Accessories Optional

Product image	Product name	EAN
	LN INV SUSPENSION KIT BK	4099854297069
	LN INV SUSPENSION WIRE	4099854323980
	LN INV 1500 THROUGHWIRING KIT	4099854214806
	LN INV INLINE CONNECTOR	4099854215612

503 Service Temporarily Unavailable

Product image	Product name	EAN
	LN INV CORNER CONNECTOR BK	4099854308079
	LN INV INFILL 600 BK	4099854297045
	LN INV INFILL 1200 BK	4099854297007
	LN INV INFILL 1500 BK	4099854297021





EQUIPMENT / ACCESSORIES









- Suspension kit available for pendant luminaire version (to be ordered separately)
- Inline, corner and infill connectors available as separate accessory
- Through-wiring cable kit available

Safety advice

- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.
- Product in protection class I. All electrically conductive, metallic housing parts that can absorb voltage during operation or during maintenance in the event of a fault must be continuously connected to the protective earthing conductor.

DOWNLOAD DATA

Documents and certificates	Document name
 User instruction / safety instructions	LN INV D DI
 Legal information	Safety Insert G11205497
 Legal information	Legal Insert G11235610
 Legal information	Informationstext 18 Abs 4 ElektroG

Documents and certificates		Document name
	Legal information	LN INV D DI
	Declarations of conformity	LN INV
	Declarations of conformity UKCA	LN INV
	Certificates	LN INV
	EU Data Act	DALI LED Driver and Luminaires
	EPD	EPD_EN_LINEAR INDIVILED DALI SEN
	EPD	EPD_FR_LINEAR INDIVILED DALI SEN
Photometric and lighting design files		Document name
	IES file (IES)	LN INV D 1500 P 52W 930 DAVR SN BK
	LDT file (Eulumdat)	LN INV D 1500 P 52W 930 DAVR SN BK
	ULD file (DIALux)	LN INV D 1500 P 52W 930 DAVR SN BK
	ROLF file (RELUX)	LN INV D 1500 P 52W 930 DAVR SN BK
	UGR file (UGR table)	LN INV D 1500 P 52W 930 DAVR SN BK
	Light distribution curve type polar	LN INV D 1500 P 52W 930 DAVR BK
CAD/BIM files		Document name
	BIM Revit 3D	Linear Indiviled G2
	CAD STEP 3D	LN INV D 1500 G2
Tender texts		Document name
	Tender documents	LINEAR INDIVILED DIRECT 1500 DALI SENSOR P 52W 930 DAVR SN BK-EN

503 Service Temporarily Unavailable



LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854371806	Folding box 1	177 mm x 1,530 mm x 102 mm	4570.00 g	27.62 dm ³
4099854371813	Shipping box 2	1,550 mm x 197 mm x 224 mm	10740.00 g	68.40 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION

LINEAR IndivLED [®] DIRECT DALI SN BK	DRIVER	mA	W	lm	lm/W	MP
LN INV D 1200 P 40W 900 DA SN BK	OSRAM	300	29	3000	100	MFC
	071 DALI SW	300	30	2900	100	MFC
	355-DALY 1A4 MFC L	700	34	4100	100	MFC
LN INV D 1200 P 40W 940 DA SN BK	OSRAM	300	45	4600	110	Phosphor
	071 DALI SW	300	25	3100	108	MFC
	355-DALY 1A4 MFC L	700	34	4300	108	MFC
LN INV D 1500 P 52W 900 DA SN BK	OSRAM	300	45	4600	100	Phosphor
	071 DALI SW	300	39	4100	101	MFC
	355-DALY 1A4 MFC L	700	44	5200	110	MFC
LN INV D 1500 P 52W 940 DA SN BK	OSRAM	300	48	5400	114	MFC
	071 DALI SW	300	39	5100	131	MFC
	355-DALY 1A4 MFC L	700	44	5700	130	MFC

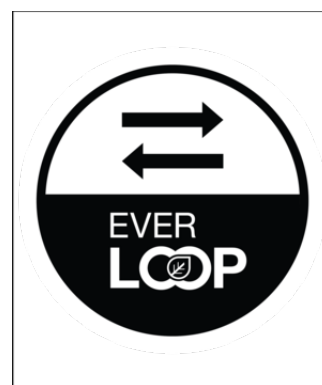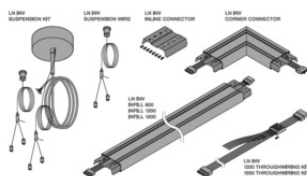

References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

503 Service Temporarily Unavailable