



AACSR IEC 61089 -Type A3/S3A Conductor, 354.74mm² + 81.04mm²

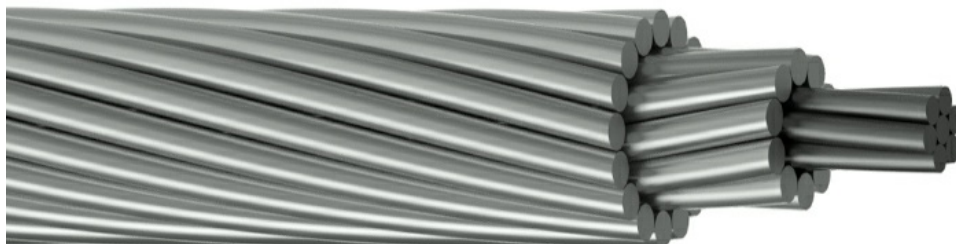

Specificații

Nume Conductor	N/A
Aria Secțională Conductor	N/A mm ²
Aria Secțională Aliaj	354.74 mm ²
Aria Secțională Fire Oțel	81.04 mm ²
Aria Secțională Conductor	N/A mm ²
Număr Fire Aluminiu	30
Număr Fire Oțel	19
Diametru Fir Aluminiu	3.91 mm
Diametru Fir Oțel	2.36 mm
Diametru Conductor	27.20 mm
Greutate Aliaj	980.7 kg/km
Greutate Oțel	634.3 kg/km
Greutate Conductor	1614.7 kg/km
Rezistență Nominală	N/A kN
Clasa A Rezistență Nominală	210.11 kN
Clasa B Rezistență Nominală	205.8 kN
Rezistență DC @ 20°C	0.0951 Ω/km
Capacitate Curent @75°C	473 A
Capacitate Curent @85°C	599 A

The above design is only a sample of the options available, for reference purposes only. Our policy of continuous improvement may result in a change of specifications without notice. If any discrepancies might be between the data sheet values and standards, we reserve the rights to make technical changes. Our company will not be held responsible, as all or any of pictures, drawings, weights and dimensions details or other elements in this document are only indicative and must not be considered contractual. Contact our sales team for other specifications or custom made products.