


## ACSR/TP ASTM B 911 Conductor, 78.5mm<sup>2</sup>, Sparrow / TP

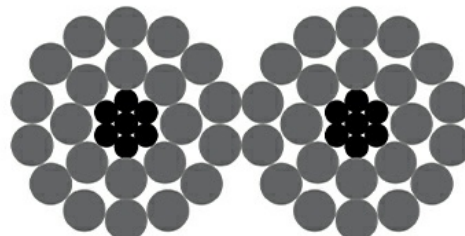

### Specificații

Nume Conductor	Sparrow / TP
Suprafață Secționată Conductor	78.5 mm <sup>2</sup>
Nr. Fire Aluminiu	6.0
Diametru Fir Aluminiu	2.67 mm
Nr. Fire Oțel	1.0
Diametru Fir Oțel	2.67 mm
Dimensiuni Exterioare Minore	8.03 mm
Dimensiuni Exterioare Majore	16.05 mm
Diametru Conductor	13.13 mm
Greutate Aluminiu	184 kg/km
Greutate Oțel	87 kg/km
Greutate Conductor	271 kg/km
Rezistență Nominală	25.2 kN
Rezistență DC @ 20°C	0.42 Ω/km
Capacitate Curent @ 75°C	200 A
Capacitate Curent @ 85°C	244 A

The above design is only a sample of the options available, for reference purposes only. Our policy of continuous improvement may result in a change of specifications without notice. If any discrepancies might be between the data sheet values and standards, we reserve the rights to make technical changes. Our company will not be held responsible, as all or any of pictures, drawings, weights and dimensions details or other elements in this document are only indicative and must not be considered contractual. Contact our sales team for other specifications or custom made products.