


## ACSR/TP ASTM B 911 Conductor, 1033.7mm<sup>2</sup>, Rail / TP

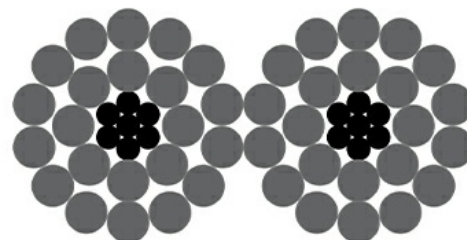

### Specificații

Nume Conductor	Rail / TP
Suprafață Secțională Conductor	1033.7 mm <sup>2</sup>
Nr. Fire Aluminiu	45.0
Diametru Fir Aluminiu	3.69 mm
Nr. Fire Oțel	7.0
Diametru Fir Oțel	2.46 mm
Dimensiuni Exterioare Minore	29.59 mm
Dimensiuni Exterioare Majore	59.18 mm
Diametru Conductor	48.41 mm
Greutate Aluminiu	2674 kg/km
Greutate Oțel	522 kg/km
Greutate Conductor	3196 kg/km
Rezistență Nominală	230.4 kN
Rezistență DC @ 20°C	0.03 Ω/km
Capacitate Curent @ 75°C	867 A
Capacitate Curent @ 85°C	1160 A

The above design is only a sample of the options available, for reference purposes only. Our policy of continuous improvement may result in a change of specifications without notice. If any discrepancies might be between the data sheet values and standards, we reserve the rights to make technical changes. Our company will not be held responsible, as all or any of pictures, drawings, weights and dimensions details or other elements in this document are only indicative and must not be considered contractual. Contact our sales team for other specifications or custom made products.