



AACSR / AW IEC 61089/EN 50182 -Type A3/20SA Conductor, 391.30mm²

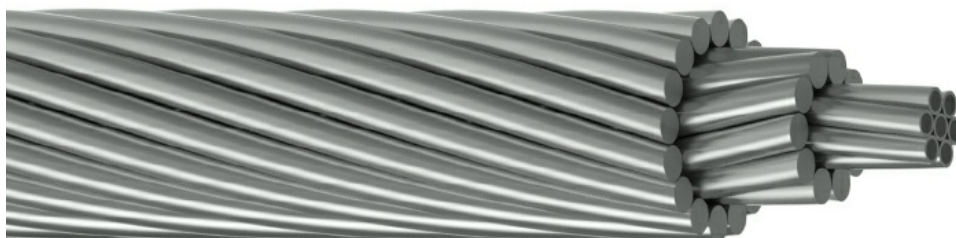

Specificații

Cod Conductor	315
Raport Oțel Conductor	7 %
Suprafață Secțiune Aliaj	366.00 mm ²
Suprafață Secțiune Conductor	391.30 mm ²
Nr. Fire Aluminiu	45
Nr. Fire Oțel	7
Diametru Fir Aluminiu	3.22 mm
Diametru Fir Oțel	2.15 mm
Diametru Conductor	25.77 mm
Greutate Conductor	1177.7 kg/km
Rezistență Nominală	154.12 kN
Rezistență DC @20°C	0.0893 Ω/km
Capacitate Curent @75°C	477 A
Capacitate Curent @85°C	603 A

The above design is only a sample of the options available, for reference purposes only. Our policy of continuous improvement may result in a change of specifications without notice. If any discrepancies might be between the data sheet values and standards, we reserve the rights to make technical changes. Our company will not be held responsible, as all or any of pictures, drawings, weights and dimensions details or other elements in this document are only indicative and must not be considered contractual. Contact our sales team for other specifications or custom made products.