



AACSR ABNT NBR 5369 Conductor, 133.46mm² + 37.45mm²

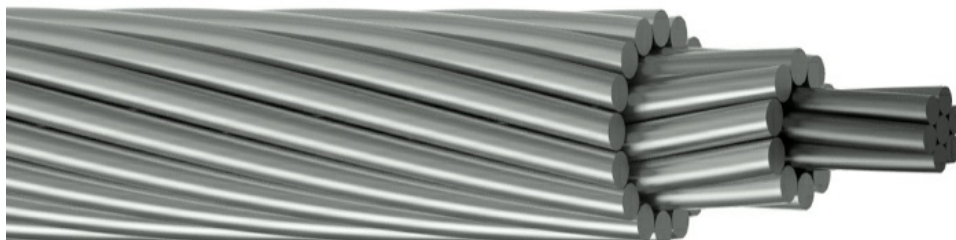

Specificații

Nume Conductor	N/A
Aria Secțională Conductor	N/A mm ²
Aria Secțională Aliaj	133.46 mm ²
Aria Secțională Fire Oțel	37.45 mm ²
Aria Secțională Conductor	N/A mm ²
Număr Fire Aluminiu	30
Număr Fire Oțel	7
Diametru Fir Aluminiu	2.38 mm
Diametru Fir Oțel	2.38 mm
Diametru Conductor	16.66 mm
Greutate Aliaj	368.9 kg/km
Greutate Oțel	292.5 kg/km
Greutate Conductor	661.4 kg/km
Rezistență Nominală	N/A kN
Clasa A Rezistență Nominală	91.8 kN
Clasa B Rezistență Nominală	89.3 kN
Rezistență DC @ 20°C	0.2528 Ω/km
Capacitate Curent @75°C	270 A
Capacitate Curent @85°C	332 A

The above design is only a sample of the options available, for reference purposes only. Our policy of continuous improvement may result in a change of specifications without notice. If any discrepancies might be between the data sheet values and standards, we reserve the rights to make technical changes. Our company will not be held responsible, as all or any of pictures, drawings, weights and dimensions details or other elements in this document are only indicative and must not be considered contractual. Contact our sales team for other specifications or custom made products.