


ACSR/TP ASTM B 911 Conductor, 496.8mm², Lark / TP

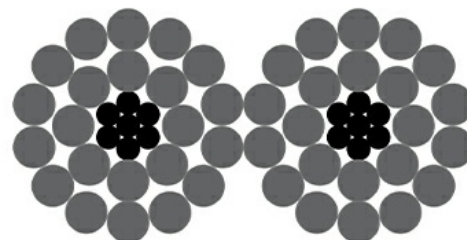

Specificații

Nume Conductor	Lark / TP
Suprafață Secțională Conductor	496.8 mm ²
Nr. Fire Aluminiu	30.0
Diametru Fir Aluminiu	2.92 mm
Nr. Fire Oțel	7.0
Diametru Fir Oțel	2.92 mm
Dimensiuni Exterioare Minore	20.47 mm
Dimensiuni Exterioare Majore	40.95 mm
Diametru Conductor	33.49 mm
Greutate Aluminiu	1117 kg/km
Greutate Oțel	734 kg/km
Greutate Conductor	1851 kg/km
Rezistență Nominală	180.6 kN
Rezistență DC @ 20°C	0.07 Ω/km
Capacitate Curent @ 75°C	559 A
Capacitate Curent @ 85°C	719 A

The above design is only a sample of the options available, for reference purposes only. Our policy of continuous improvement may result in a change of specifications without notice. If any discrepancies might be between the data sheet values and standards, we reserve the rights to make technical changes. Our company will not be held responsible, as all or any of pictures, drawings, weights and dimensions details or other elements in this document are only indicative and must not be considered contractual. Contact our sales team for other specifications or custom made products.