



PERFECT FOR AGRI-PV SOLUTIONS



Deutsche  
Qualität  
Garantiert

# 315W-335W

**Terra E** | CMD-80BD

**40%**  
HIGH TRANSPARENCY

**80**  
HALF CELLS

- ◆ Protects crops from heavy rain, hail, and wind
- ◆ Protects crops against frost and drought under extreme sunshine
- ◆ Suitable for installation on greenhouse roofs
- ◆ 40% light transmission for homogeneous light distribution under the module
- ◆ Highly reliable and durable under mechanical loads




Ver. 26.1.1

**30 YEARS**  
Performance Warranty

up to **30 YEARS\***  
Product Warranty

\*The regular product warranty is 15 years, please refer to the latest version of AESOLAR Limited Warranty for the duration of the product warranty under special conditions. For extensions, please contact AESOLAR staff.

### OUR PERFORMANCE WARRANTY

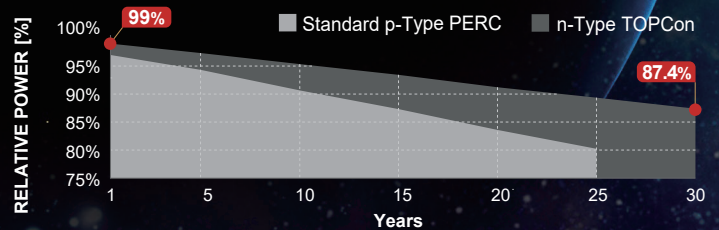

**AESOLAR**

Since 2003



LID RESISTANT



PID RESISTANT



SALT CORROSION RESISTANT



SAND RESISTANT



AMMONIA RESISTANT






HIGHLY STABLE AND TOUGH

# AE CMD-80BD 315W-335W

PERFECT FOR AGRI-PV SOLUTIONS

BIFACIAL • DOUBLE-GLASS

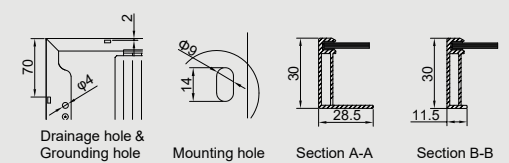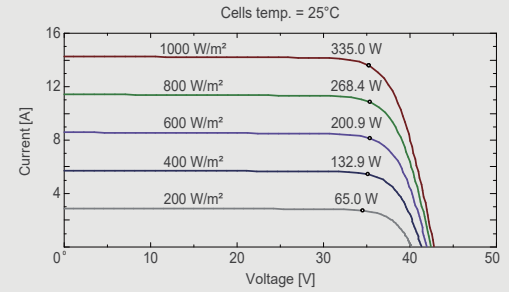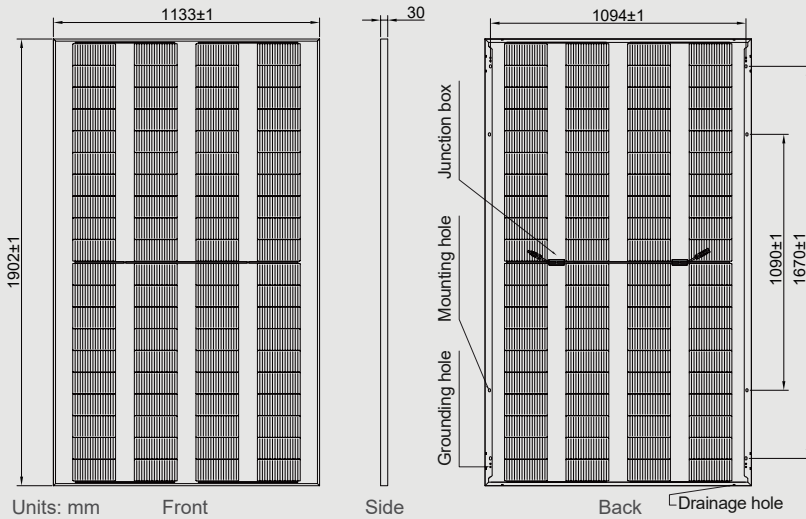

## Electrical specifications (STC\*):

Parameter	$P_{max}$ (Wp)	315	320	325	330	335
Nominal max. power	$P_{max}$ (Wp)	315	320	325	330	335
Maximum operating voltage	$V_{MPP}$ (V)	23.35	23.58	23.69	23.93	24.16
Maximum operating current	$I_{MPP}$ (A)	13.49	13.57	13.72	13.79	13.87
Open-circuit voltage	$V_{oc}$ (V)	27.67	27.95	28.11	28.37	28.62
Short-circuit current	$I_{sc}$ (A)	14.23	14.31	14.45	14.54	14.63
Module efficiency	$\eta$ (%)	14.62	14.85	15.08	15.31	15.55
Power tolerance	(W)			0~+5		
Maximum system voltage	(V)			1500		
Maximum series fuse rating	(A)			25		

\*STC: Standard Test Conditions (irradiance 1000 W/m<sup>2</sup>, cell temperature 25°C and air mass of AM1.5), measurement tolerance  $P_{max}$ : ±3%

## Electrical specifications (NMOT\*):

Parameter	$P_{max}$ (Wp)	240	245	250	255	260
Nominal max. power	$P_{max}$ (Wp)	240	245	250	255	260
Maximum operating voltage	$V_{MPP}$ (V)	21.96	22.29	22.50	22.83	23.15
Maximum operating current	$I_{MPP}$ (A)	10.93	10.99	11.11	11.17	11.23
Open-circuit voltage	$V_{oc}$ (V)	26.03	26.42	26.70	27.06	27.43
Short-circuit current	$I_{sc}$ (A)	11.53	11.59	11.70	11.78	11.85

\*NMOT: Normal Module Operating Temperature (irradiance 800 W/m<sup>2</sup>, ambient temperature 20°C, air mass of AM1.5 and wind speed of 1 m/s)

## Bifacial electrical specifications


Parameter	315	320	325	330	335
Max. power front-side	315	320	325	330	335
$P_{max}$ front (Wp)					
Backside Power Gain	5% 10%	5% 10%	5% 10%	5% 10%	5% 10%
Total equivalent power	331 347	336 352	341 358	347 363	352 369
$P_{max}$ equ (Wp)					
Module efficiency	15.35 16.08	15.59 16.33	15.84 16.59	16.08 16.84	16.32 17.10
$\eta$ (%)					

\*Bifacial Gain: The additional gain from the back side compared to the power of the front side at the standard test condition. It depends on the mounting (structure, height, tilt angle, etc.) and albedo of the ground.

## Mechanical and design specification

Cell type	n-Type TOPCon technology, half-cut cells
No. of cells	80
Transparency	40%
Bifaciality	80 ± 5%
Front cover	2.0 mm glass, high transmission, AR coated, tempered
Encapsulation	POE
Back cover	2.0 mm transparent glass, tempered
Junction box	IP68 rated, 2 bypass diodes
Frame	30 mm anodized aluminium alloy
Cable (Including Connector)	1 x 4 mm <sup>2</sup> , 350 mm length or customized
Connectors	MC 4 / MC 4 compatible
Dimension	1902 mm x 1133 mm x 30 mm
Weight	25.5 kg
Hail resistance	Max. Ø 25 mm at 23 m/s
Wind load	2400 Pa or 244 kg/m <sup>2</sup>
Snow load	5400 Pa or 550 kg/m <sup>2</sup>
Fire rating	Class A (according to UL 790)

## Packaging information

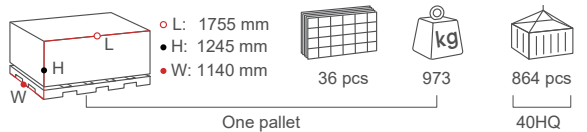

## Temperature ratings

Operating temperature	-40 to +85°C
Temp. coefficient of $P_{max}$	-0.29 %/°C
Temp. coefficient of $V_{oc}$	-0.25 %/°C
Temp. coefficient of $I_{sc}$	0.046 %/°C
Nom. operating cell temp. NOCT	42 ± 2°C

## SYSTEM AND PRODUCT CERTIFICATIONS



IEC 61215 IEC 61730 IEC 62716 (Ammonia corrosion)  
 Regular Production Surveillance IEC 61701 (Salt mist corrosion)  
 www.tuv.com IEC 60068 (Sand and dust)  
 IEC 62804 (PID resistance)

The specifications and characteristics contained in this datasheet may deviate slightly from our actual products due to the product developments and uncertainty of measurement devices. The specifications included in the datasheet are subject to change without prior notice.