


Fire Alarm Cable JY(ST)Y 4x2 CL-1 RM 300V

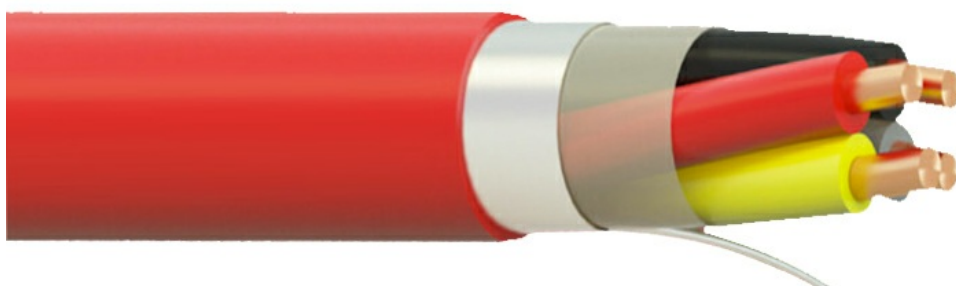

Description

JY(ST)Y cables are used indoor for fire alarm systems that transmits the signal and data between control panels, detectors, buttons and area control modules.

Standards

EN 60228
EN 50290-2-21
EN 50290-2-22
EN 60332-1-2
TS13767

Construction

Conductor: Class 1 copper
Insulation: PVC
Sheath: PVC

Specifications

Cable Type	Multi core
Cable Overall Diameter	8 mm
Cable Weight	90 kg/km
Conductor Material	Copper
Number of Conductors	4
Conductor Cross-Section	2 mm ²
Conductor Weight	41 kg/km
Conductor Class	CL-1
Conductor Type	RM
Insulation Material	PVC
Outersheath Material	PVC
Rated Voltage (Uo/U)	0.3 kV
Max. Permissible Operating Temperature	-30 >< +70 °C
Working Temperature	-30 >< +70 °C
Short Circuit Temperature	N/A °C
Minimum Bending Radius (Installing)	10xD
Minimum Bending Radius (Operating)	8xD
Packing	Rolls
Delivery Lengths	To be confirmed by offer
Delivery Length Tolerance	±5%

The above design is only a sample of the options available, for reference purposes only. Our policy of continuous improvement may result in a change of specifications without notice. If any discrepancies might be between the data sheet values and standards, we reserve the rights to make technical changes. Our company will not be held responsible, as all or any of pictures, drawings, weights and dimensions details or other elements in this document are only indicative and must not be considered contractual. Contact our sales team for other specifications or custom made products.