


## Perforated Cable Trays WRF, HDG, Fast Connection, Thickness: 2 mm, Width: 100 mm, Height: 60 mm

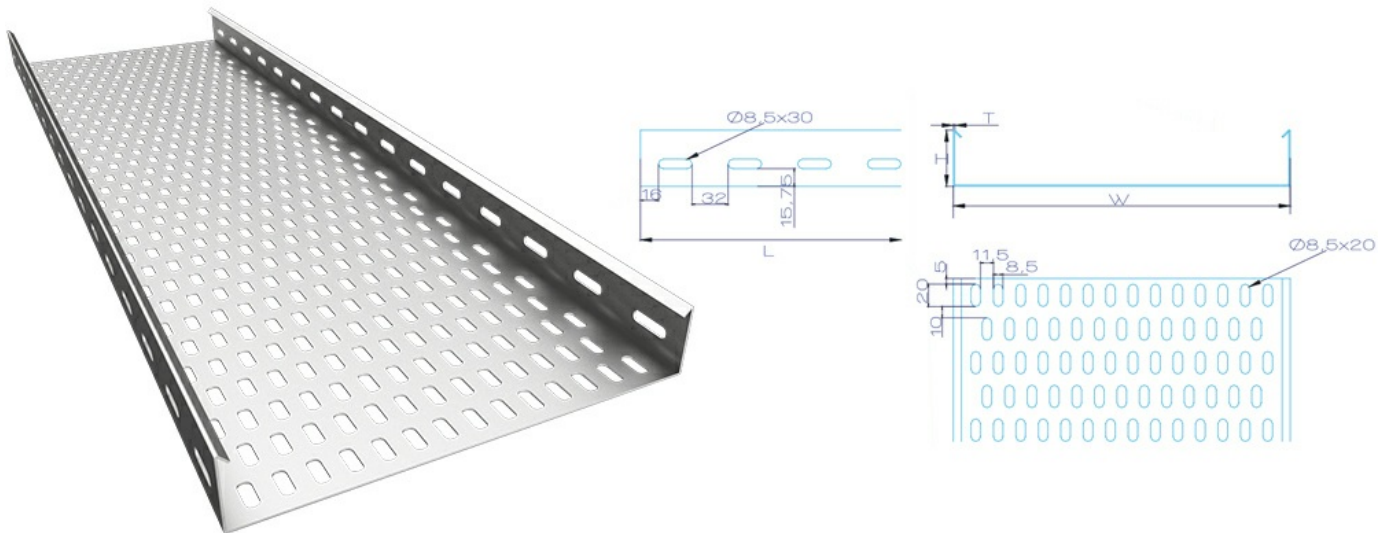

### Description

Perforated and Solid Cable Tray is a one piece support with either ventilated (perforated) or solid bottom (non perforated) sections. These sections are used with a single power cable, multiple control, or signal circuit cables.

Features & Benefits:

- Designed to support cabling in 3.0m spans or less. Two flange designs to provide added overall strength to tray
- Perforated bottom design allows for hold down attachment, cable attachment, and heat dissipation
- Continuous solid bottom tray allows for constant cable support

### Dimensions

Thickness	2
Width	100.0
Height	60.0
Length	3000.0
Weight	11.31
Finish	HDG
Connection Type	Fast Connection

The above design is only a sample of the options available, for reference purposes only. Our policy of continuous improvement may result in a change of specifications without notice. If any discrepancies might be between the data sheet values and standards, we reserve the rights to make technical changes. Our company will not be held responsible, as all or any of pictures, drawings, weights and dimensions details or other elements in this document are only indicative and must not be considered contractual. Contact our sales team for other specifications or custom made products.