


ACSR/TP ASTM B 911 Conductor, 546.2mm², Flicker / TP

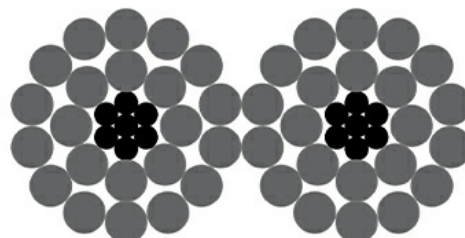

Specificații

Nume Conductor	Flicker / TP
Suprafață Secționă Conductor	546.2 mm ²
Nr. Fire Aluminiu	24.0
Diametru Fir Aluminiu	3.58 mm
Nr. Fire Oțel	7.0
Diametru Fir Oțel	2.38 mm
Dimensiuni Exterioare Minore	21.49 mm
Dimensiuni Exterioare Majore	42.98 mm
Diametru Conductor	35.15 mm
Greutate Aluminiu	1336 kg/km
Greutate Oțel	490 kg/km
Greutate Conductor	1826 kg/km
Rezistență Nominală	153.0 kN
Rezistență DC @ 20°C	0.06 Ω/km
Capacitate Curent @ 75°C	610 A
Capacitate Curent @ 85°C	788 A

The above design is only a sample of the options available, for reference purposes only. Our policy of continuous improvement may result in a change of specifications without notice. If any discrepancies might be between the data sheet values and standards, we reserve the rights to make technical changes. Our company will not be held responsible, as all or any of pictures, drawings, weights and dimensions details or other elements in this document are only indicative and must not be considered contractual. Contact our sales team for other specifications or custom made products.