



## AAAC EN 50182-Type-AL3 United Kingdom Conductor, 211.0mm<sup>2</sup>, ELM, 211-AL3

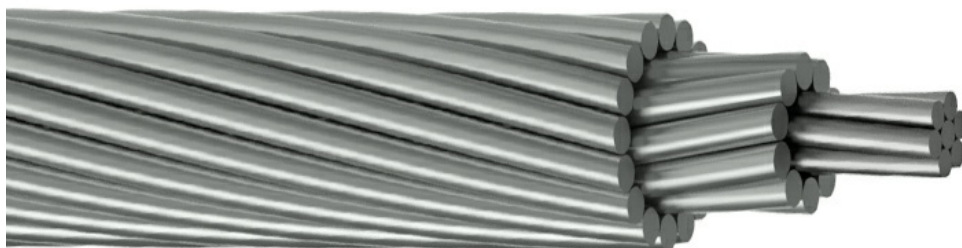

### Specificații

Cod Conductor	211-AL3
Nume Conductor	ELM
Secțiunea Conductorului	211.0 mm <sup>2</sup>
Număr Fire Aluminiu	19
Diametrul Firului	3.76 mm
Diametrul Conductorului	18.8 mm
Greutatea Conductorului	579.2 kg/km
Rezistență Mecanică Nominală	62.24 kN
Rezistență Curent Continuu @ 20°C	0.1568 Ω/km
Capacitate Curent @75°C	350 A
Capacitate Curent @85°C	433 A

The above design is only a sample of the options available, for reference purposes only. Our policy of continuous improvement may result in a change of specifications without notice. If any discrepancies might be between the data sheet values and standards, we reserve the rights to make technical changes. Our company will not be held responsible, as all or any of pictures, drawings, weights and dimensions details or other elements in this document are only indicative and must not be considered contractual. Contact our sales team for other specifications or custom made products.