



## ACSR/AW ASTM B 549, 404mm<sup>2</sup>, Coot/AW Conductor

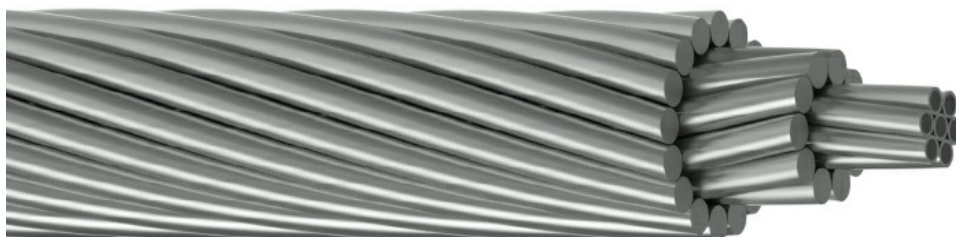

### Specifications

Nume Conductor	Coot/AW
Cod Conductor	N/A
Suprafață Secționată Conductor	404 mm <sup>2</sup>
Clasă Conductor	AA
Nr. Fire Aluminiu	36
Nr. Fire Oțel	1
Diametru Fir Aluminiu	3.77 mm
Diametru Fir Oțel	3.77 mm
Diametru Conductor	26.39 mm
Greutate Conductor	74 kg/km
Rezistență Nominală	1183 kN
Rezistență DC @ 20°C	0.0708 Ω/km
Capacitate Curent @ 75°C	532 A
Capacitate Curent @ 85°C	671 A

The above design is only a sample of the options available, for reference purposes only. Our policy of continuous improvement may result in a change of specifications without notice. If any discrepancies might be between the data sheet values and standards, we reserve the rights to make technical changes. Our company will not be held responsible, as all or any of pictures, drawings, weights and dimensions details or other elements in this document are only indicative and must not be considered contractual. Contact our sales team for other specifications or custom made products.