



## ACSR/AW ASTM B 549, 57mm<sup>2</sup>, 2/0 (3/4) AWAC Conductor

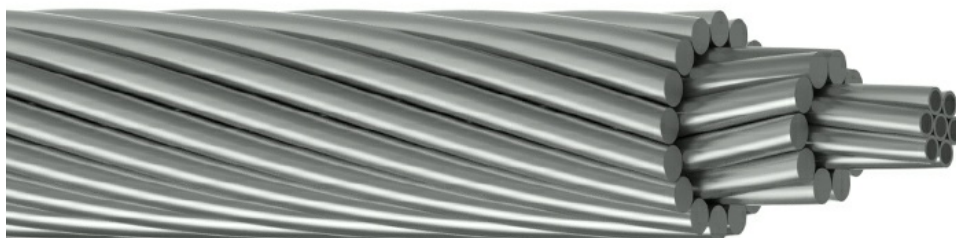

### Specifications

Nume Conductor	N/A
Cod Conductor	2/0 (3/4) AWAC
Suprafață Secțională Conductor	57 mm <sup>2</sup>
Clasă Conductor	AA(+)
Nr. Fire Aluminiiu	3
Nr. Fire Oțel	4
Diametru Fir Aluminiiu	4.63 mm
Diametru Fir Oțel	4.63 mm
Diametru Conductor	13.89 mm
Greutate Conductor	73 kg/km
Rezistență Nominală	588 kN
Rezistență DC @ 20°C	0.3919 Ω/km
Capacitate Curent @ 75°C	195 A
Capacitate Curent @ 85°C	237 A

The above design is only a sample of the options available, for reference purposes only. Our policy of continuous improvement may result in a change of specifications without notice. If any discrepancies might be between the data sheet values and standards, we reserve the rights to make technical changes. Our company will not be held responsible, as all or any of pictures, drawings, weights and dimensions details or other elements in this document are only indicative and must not be considered contractual. Contact our sales team for other specifications or custom made products.