


## ACSR/TP ASTM B 911 Conductor, 1139.2mm<sup>2</sup>, Whooper / TP

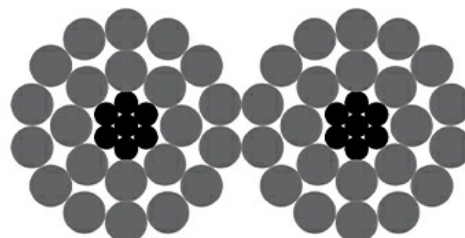

### Specificații

|                                |                        |
|--------------------------------|------------------------|
| Nume Conductor                 | Whooper / TP           |
| Suprafață Secțională Conductor | 1139.2 mm <sup>2</sup> |
| Nr. Fire Aluminiu              | 48.0                   |
| Diametru Fir Aluminiu          | 3.72 mm                |
| Nr. Fire Oțel                  | 7.0                    |
| Diametru Fir Oțel              | 2.89 mm                |
| Dimensiuni Exterioare Minore   | 31.06 mm               |
| Dimensiuni Exterioare Majore   | 62.13 mm               |
| Diametru Conductor             | 50.82 mm               |
| Greutate Aluminiu              | 2898 kg/km             |
| Greutate Oțel                  | 721 kg/km              |
| Greutate Conductor             | 3619 kg/km             |
| Rezistență Nominală            | 274.0 kN               |
| Rezistență DC @ 20°C           | 0.03 Ω/km              |
| Capacitate Curent @ 75°C       | 902 A                  |
| Capacitate Curent @ 85°C       | 1214 A                 |

The above design is only a sample of the options available, for reference purposes only. Our policy of continuous improvement may result in a change of specifications without notice. If any discrepancies might be between the data sheet values and standards, we reserve the rights to make technical changes. Our company will not be held responsible, as all or any of pictures, drawings, weights and dimensions details or other elements in this document are only indicative and must not be considered contractual. Contact our sales team for other specifications or custom made products.