



ACSR/AW-Z Conductor, 265.17mm²

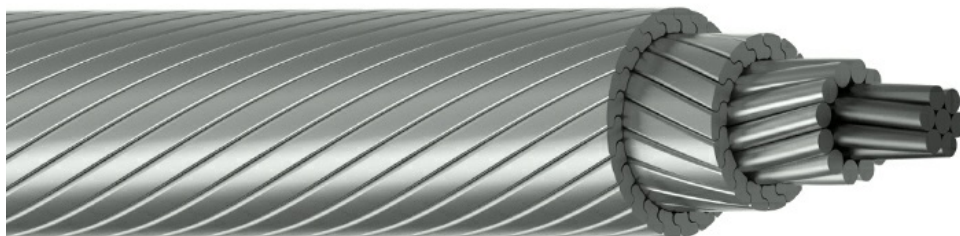

Specificații

Nr. Fire Oțel	7
Diametru Fir Oțel	2.8 mm
Număr Fire Rotunde De Aluminiu	N/A
Diametru Fire Rotunde De Aluminiu	N/A mm
Număr Straturi Fire În Formă De Z	2
Număr Fire În Formă De Z	30
Diametru Fire În Formă De Z	3.07 mm
Suprafață Secțională Fire De Oțel	43.1 mm ²
Suprafață Secțională Fire Rotunde	N/A mm ²
Suprafață Secțională Fire În Formă De Z	222.07 mm ²
Suprafață Secțională Conductor	265.17 mm ²
Diametru Conductor	19.6 mm
Greutate Conductor	897.5 kg/km
Rezistență Nominală	95.26 kN
Rezistență DC @ 20°C	0.1219 Ω/km
Capacitate Curent @ 75°C	395 A
Capacitate Curent @ 85°C	489 A

The above design is only a sample of the options available, for reference purposes only. Our policy of continuous improvement may result in a change of specifications without notice. If any discrepancies might be between the data sheet values and standards, we reserve the rights to make technical changes. Our company will not be held responsible, as all or any of pictures, drawings, weights and dimensions details or other elements in this document are only indicative and must not be considered contractual. Contact our sales team for other specifications or custom made products.