



## AACSR / AW IEC 61089/EN 50182 -Type A2/20SA Conductor, 242.80mm<sup>2</sup>

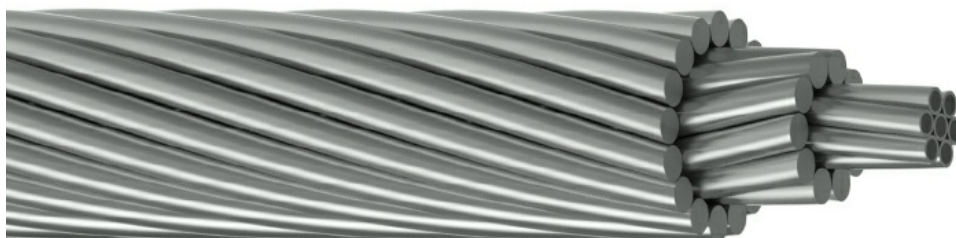

### Specificații

Cod Conductor	200
Raport Oțel Conductor	6 %
Suprafață Secțiune Aliaj	230.00 mm <sup>2</sup>
Suprafață Secțiune Conductor	242.80 mm <sup>2</sup>
Nr. Fire Aluminiu	18
Nr. Fire Oțel	1
Diametru Fir Aluminiu	4.04 mm
Diametru Fir Oțel	4.04 mm
Diametru Conductor	20.20 mm
Greutate Conductor	717.5 kg/km
Rezistență Nominală	84.73 kN
Rezistență DC @20°C	0.1411 Ω/km
Capacitate Curent @75°C	372 A
Capacitate Curent @85°C	463 A

The above design is only a sample of the options available, for reference purposes only. Our policy of continuous improvement may result in a change of specifications without notice. If any discrepancies might be between the data sheet values and standards, we reserve the rights to make technical changes. Our company will not be held responsible, as all or any of pictures, drawings, weights and dimensions details or other elements in this document are only indicative and must not be considered contractual. Contact our sales team for other specifications or custom made products.